



Samsung T139 Pad Buttons Replacement

Use this guide to replace the pad buttons on your Samsung T139.

Written By: Reagan May



INTRODUCTION

Use this guide to replace a worn out button pad on your Samsung T139.



TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)



PARTS:

- [Samsung T139 SGH-T139 Pad Buttons](#) (1)

Step 1 — Remove Back Cover



- ⓘ Power off your phone before beginning disassembly
- Apply pressure to the back cover and slide towards the base

Step 2 — Remove Battery



- With a plastic opening tool, lift and remove the battery

Step 3 — Remove Screws




- Remove the four Phillips 1.0mm #0 screws

Step 4 — Remove Black Plastic Cover




- Using the plastic opening tool, work around the edge of the black plastic cover until it pops off

Step 5 — Remove Side Buttons

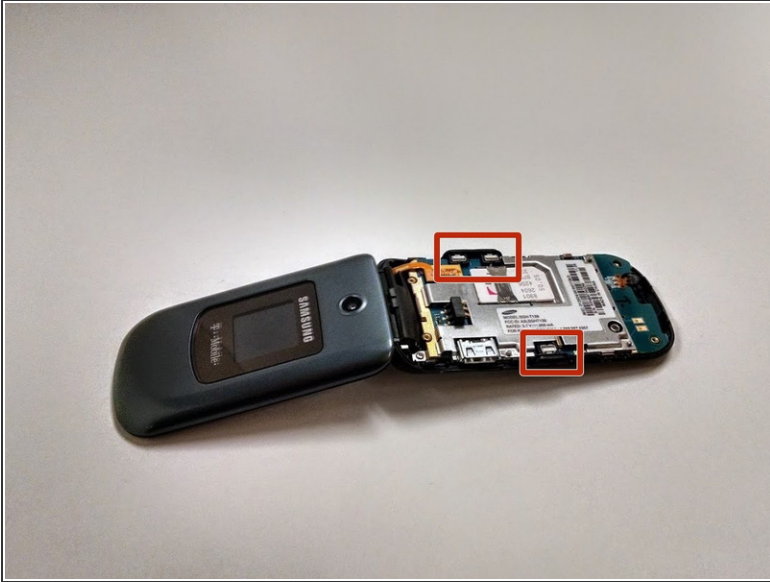

- Remove side buttons by lifting them off the board


Step 6 — Remove Circuit Board

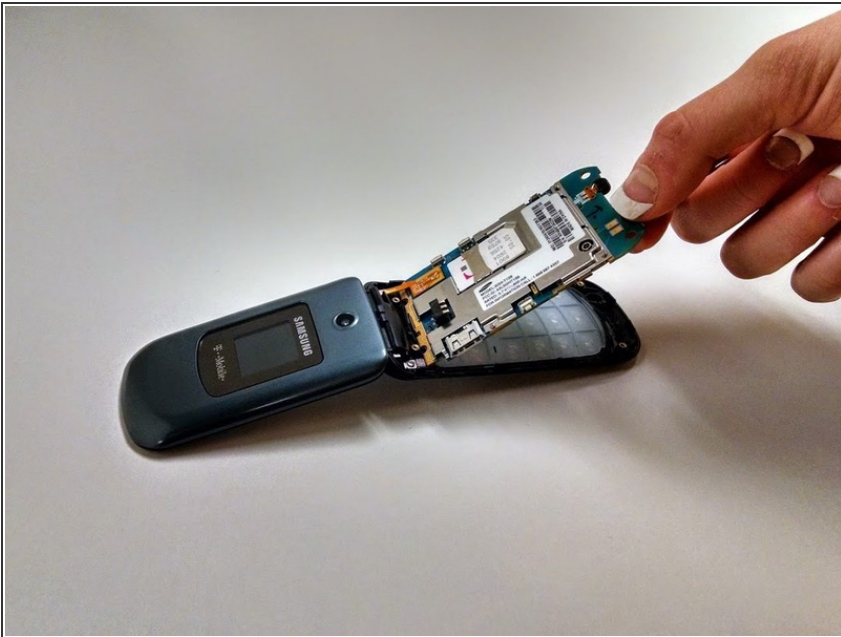

- Lift circuit board up gently

⚠ Be careful to not pull ribbon cord apart when removing

Step 7 — Remove Button Pad

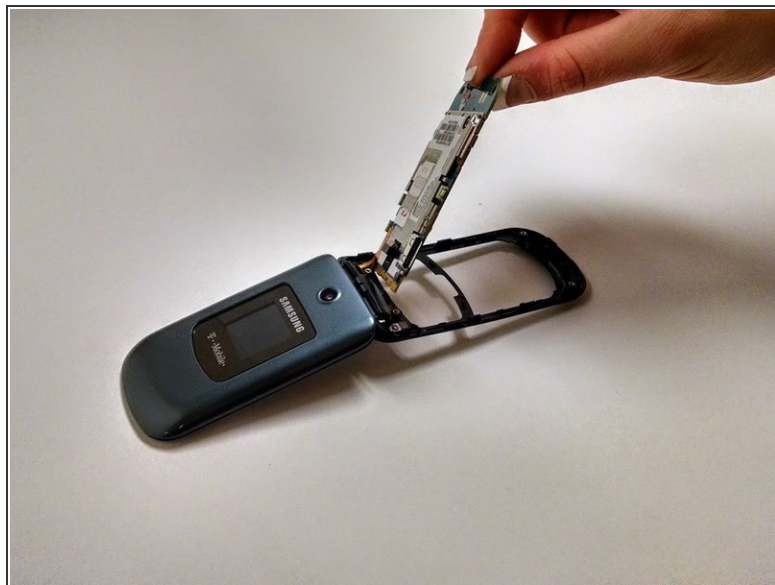

- Lift away button pad

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-11-02 04:41:53 PM.